The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed K Behen

Dated 1 April 2003

Patents Form 1/77

Patents Act 1977
(Rule 16)

The Patent Office

22FEB02 E698151-1 D02973
P01/7700 0.00-0204173.9

THE PATENT OFFICE
A
22 FEB 2002
RECEIVED BY FAX

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

P71597GB

2. Patent application number
(The Patent Office will fill in this part)

0204173.9

22 FEB 2002

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

Compact Engineering Limited
Thirsk Industrial Park
Thirsk
North Yorkshire
YO7 3BX
United Kingdom

Patents ADP number *(if you know it)*

5645361002

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

INFRA RED DRYER

5. Name of your agent *(if you have one)*

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*

Fountain Precinct
Leopold Street
Sheffield
S1 2QD

Patents ADP number *(if you know it)*

7914237001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country	Priority application number *(if you know it)*	Date of filing *(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing *(day / month / year)*

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	
Description	11
Claim(s)	3
Abstract	1
Drawing(s)	6 only

10. If you are also filing any of the following, state how many against each item.

Priority documents	
Translations of priority documents	
Statement of inventorship and right to grant of a patent *(Patents Form 7/77)*	
Request for preliminary examination and search *(Patents Form 9/77)*	1 ✓
Request for substantive examination *(Patents Form 10/77)*	
Any other documents *(please specify)*	

11. I/We request the grant of a patent on the basis of this application.

Signature [signature] Date 22.02.2002

12. Name and daytime telephone number of person to contact in the United Kingdom Vanessa J Potter 0114 274 3700

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*

b) *Write your answers in capital letters using black ink or you may type them.*

c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*

d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*

e) *Once you have filled in the form you must remember to sign and date it.*

f) *For details of the fee and ways to pay please contact the Patent Office.*

INFRA RED DRYER

This invention relates to the field of infra red dryers, in particular short-wave infra red for use in drying paper, board or the like in the papermaking industry.

In the papermaking industry, it is necessary to dry the newly-manufactured paper or board ("the sheet") by promoting the evaporation of moisture from the sheet. This is achieved partially by the passing of the sheet over a series of steam-filled drying cylinders and partially by the use of an infra red ("IR") dryer such as the APOLLO ® shortwave IR dryer manufactured by Compact Engineering Ltd of Thirsk, United Kingdom.

Such an IR dryer is typically placed adjacent the last of the series of drying cylinders and is positioned as close to the moving sheet as possible in order to maximise the drying effect. Drying is achieved by the absorption of IR by the sheet, which causes moisture held by the fibre to evaporate. By careful selection of the wavelength of the IR, excitation of the water molecules can be optimised without creating unnecessary heat which would present a fire risk.

Clearly, the risk of fire is a concern in the papermaking industry, particularly in a situation where the fast-moving sheet breaks or crumples and may come into contact with the IR dryer. In such a case it is essential that the surface of the IR dryer is not hot enough to cause combustion. This risk is addressed by the APOLLO ® shortwave IR dryer which has an optical-quality quartz plate intermediate the IR-emitting lamps and the moving sheet. The quartz plate is air-cooled, the air flow not

only promotes evaporation of moisture from the sheet but also ensures that the quartz plate does not become hot enough to cause risk of combustion.

A typical arrangement is shown in Figure 1 wherein an IR dryer 1 is located adjacent a drying cylinder 2 over which the sheet 3 passes in the direction indicated by arrow A. The IR dryer comprises an array of heating elements 4, each encased in a quartz tube 5, a reflector 6 and a planar quartz plate 7 which protects the lamps (the heating elements encased in quartz tubes) from the moving sheet and from any debris in the vicinity of the apparatus. This plate is known as a "lamp protection plate". A cooling air flow is provided as indicated by the dotted arrows.

Although very effective, a quartz plate of the type illustrated in Figure 1 is relatively expensive to manufacture, typically being produced from an opened and flattened cylinder of quartz.

Furthermore, as can be seen in Figure 1, the IR dryer 1 is not located at a constant distance from the moving sheet, because it has a planar lamp array and quartz plate adjacent the curved surface of the drying cylinder. Optimum drying occurs at point X, with a progressive loss of efficiency between point X and each of the end points Y, Y'. Towards points Y and Y', more scattering (reflection) of the IR occurs, rather than the desired absorption which occurs most effectively at point X. This problem has, up to now, been impossible to avoid since all commercially-available IR dryers have this planar arrangement.

It is thus an object of the present invention to

alleviate the above-mentioned problems.

According to a first aspect of the present invention there is provided a method of bending an elongate quartz tube comprising the steps of

supporting the tube in a substantially vertical orientation;

gripping the tube near its uppermost end;

heating the tube at region intermediate its lowermost end and the uppermost end; and

moving the gripped uppermost end of the tube so that the tube, softened in the vicinity of the heating region, is bent.

Preferably, the gripped uppermost end of the tube is moved in an arc.

Preferably, the tube is counterbalanced.

Preferably, the lowermost end of the tube is constrained to move in a substantially vertical path.

According to a second aspect of the invention, there is provided apparatus for bending an elongate quartz tube comprising

support means for supporting the tube in a substantially vertical orientation;

gripping means for gripping the tube near its uppermost end;

heating means situated at region intermediate the lowermost end and the uppermost end of the tube; and

driving means for moving the gripped uppermost end of the tube, in use, so that the tube, softened in the vicinity of the heating means, is bent.

Preferably, the heating means substantially surrounds the tube, in use.

Preferably, the heating means comprises a plurality of gas burners. Ideally the plurality of gas burners comprises a ring of gas burners, in the centre of which the tube is situated, in use.

In a preferred form, the apparatus is provided with barrier means which has a curved surface against which the tube may abut, in use, so as to prevent lateral movement of the tube. Advantageously, the barrier means comprises a wheel. Ideally, the wheel is removeable and replaceable with a wheel of different diameter.

Preferably, the apparatus further comprises a counter-balance arrangement by means of which the lowermost end of the tube can be constrained, in use, to follow a substantially vertical path.

In a preferred form, said driving means comprises a pivotable arm, at one end of which is situated said gripping means, the arm being pivotable, in use, so that the gripping means generally describes an arc. Ideally, said pivotable arm is driven by a motor.

Preferably, said gripping means is water-cooled.

According to a third aspect of the invention, there is provided a curved quartz tube manufactured using the apparatus and/or method of any of the preceding paragraphs. Preferably, an infra red (IR) heating element is located within the curved quartz tube.

According to a fourth aspect of the invention there is provided an IR dryer for use in the papermaking industry which includes an array of curved lamps each of which lamps comprises a heating element located within a curved quartz tube as claimed in the preceding paragraph. Ideally, the dryer further includes a curved reflector plate.

According to a fifth aspect of the invention there is provided an IR dryer for use in the papermaking industry including a curved lamp protection plate which comprises an array of curved quartz tubes as described above.

Preferred embodiments of the present invention will now be more particularly described, by way of example only, with reference to the accompanying drawings wherein,

Figure 1 is a cross-sectional view of a known type of IR dryer adjacent a drying cylinder (PRIOR ART);

Figure 1A is a schematic top view of the array of quartz tubes (PRIOR ART);

Figure 2A is an end view of a curved quartz tube according to one aspect of the invention;

Figure 2B is a side view (on arrow A) of the tube shown in Figure 2A;

Figure 3 is a schematic side view of apparatus for bending a quartz tube, with a quartz tube in place ready to be bent;

Figure 4, drawn to a smaller scale, shows the apparatus of Figure 3 part-way through the bending process;

Figure 5 shows the apparatus of Figure 4 at the end of the bending process;

Figure 6 is a cross-sectional view of an IR dryer incorporating curved quartz tubes; and

Figure 6A is a schematic top view of the IR dryer of Figure 6.

Throughout this application, the term "quartz" is used to refer to vitreous silica or quartz glass.

Quartz tubes are commonly known in the field of IR paper drying. Such tubes are elongate, hollow, quartz tubes each of which are used to accommodate an IR heating element. A plurality of such tubes containing heating elements ("lamps") are arranged side-to-side to create the array of IR lamps illustrated in Figures 1 and 1A and known as prior art. In this arrangement it is important that the quartz tubes are very straight so that they can be located closely adjacent one another without creating gaps therebetween and so that the array of tubes is substantially flat.

In contrast, the first aspect of the present invention relates to a process for bending quartz tubes to create a curved tube of the type shown in Figure 2. The curved tube 10 is bent in one plane only, i.e. so that it is still very straight in directions X and Y (as shown in Figures 2A and 2B) but is curved in direction Z.

The quartz tubes are those commonly known in the field of IR dryers for the paper making industry such as are normally used to enclose an IR heating element. The

quartz tubes are bent using apparatus as illustrated in Figures 3-5.

Referring to Figure 3, the apparatus comprises a floor-standing frame support 11, in which can be supported a quartz tube 10. The quartz tube 10 is held in a substantially vertical position and is gripped at its upper end by gripping means 12. The gripping means 12 may be water-cooled when the apparatus is in use.

A guide wheel 13 provides a barrier means for the quartz tube 10. The guide wheel 13 is mounted as illustrated in Figure 3 so that the quartz tube when hanging from the gripping means 12 is near an edge of the guide wheel 13. When the apparatus is in use, the guide wheel 13 prevents lateral movement of the quartz tube as described in more detail below. The guide wheel may be removeable and replaceable with a wheel of different diameter.

Intermediate the guide wheel ("the barrier means") and the gripping means is a ring burner 14 which surrounds the quartz tube 10. The ring burner is preferably a gas-powered ring burner, but other suitable means for localised heating of the quartz tube may be envisaged. It is important to note that ring burner 14 ("the heating means") is situated between the guide wheel and the gripping means.

The gripping means 12 is mounted at the distal end of a pivotable arm 15 which is pivotable about a pivot point 16. The pivoting of the arm 15 is controlled by a driving means (not shown) which may be, for example, an electric motor.

Alignment of the quartz tube during bending may be

effected using a counterbalanced arrangement comprising a glass follower 17 which runs in a track 18. The follower 17 includes an upstanding spigot 17A which is of suitable diameter to fit within the lowermost end of the hollow quartz tube. The follower 17 is slidably mounted in track or guide rail 18 so that the lowermost end (by means of the spigot 17A and track-mounted follower 17) is constrained to move only vertically i.e. along track 18. The mass of follower 17 and spigot 17A is such that it counterbalances the mass of the quartz tube 10. Alternatively, a geared mechanism could be used to achieve this effect.

With reference to Figures 4 and 5, the apparatus is used as follows. The ring burner 14 is ignited so as to heat the region of the quartz tube enclosed by the burner. This causes the quartz tube to heat up and soften in that particular region.

The driving means (not shown) causes the pivotable arm 15 to pivot about point 16 in the direction indicated by the arrow in Figure 4. The pivoting is controlled and relatively slow, the speed being determined according to the dimensions and type of quartz tube being bent and may take into account other factors such as the temperature of the heating means etc. The pivoting of the arm 15 causes the gripping means 12 to describe an arc, pulling the gripped uppermost end of the quartz tube 10 with it, so as to bend the tube. Undesirable lateral movement of the quartz tube (i.e. toward the pivot point 16) is prevented by abutment of the tube (lower down) against the guide wheel 13. Such undesirable lateral movement may occur if the quartz tube has greater diameter than expected or if the tube is not hot enough to bend properly in the vicinity of the heating means.

As the gripped uppermost end of the quartz tube is being moved by the pivotable arm, the whole quartz tube is moving vertically. The glass follower 17(and hence the lowermost end of the quartz tube) is constrained to move vertically within the track 18 so that the straightness of the quartz tube in two of the three dimensions is maintained. Thus the tube is only bent in one desired dimension.

Figure 5 illustrates the apparatus at the end of the bending process. The quartz tube 10 has been moved to its maximum vertical extent (for example limited by the spigot 17A reaching the frame 11)and the quartz tube is now curved, having been bent along its entire length. Key factors in determining the degree of curvature are the radius between the pivot point 16 and the ring burner 14, and the diameter (and hence mass) of the quartz tube which needs to be softened.

Once sufficiently cooled, the curved quartz tube can be removed from the apparatus and should resemble that illustrated in Figure 2.

Two novel uses for the curved quartz tube are illustrated in Figures 6 and 6A, although both need not necessarily be used within the same IR drying apparatus. Figure 6 is a cross-sectional view of IR drying apparatus for use in the paper-making industry. As with Figure 1, a drying cylinder 2 is illustrated, over which a paper web 3 moves in the direction indicated by the arrow A.

The IR dryer 20 comprises an array 21 of heating elements 4, each encased in a curved quartz tube 10 to form a "lamp", a curved reflector 22 and a curved quartz plate

23 which protects the lamps from the moving sheet and from any debris in the vicinity of the apparatus.

Unlike the prior art illustrated in Figure 1, the curved quartz plate 23 is not made from a single piece of flattened quartz. An array of curved quartz tubes 10 can be used, in side-to-side arrangement to form a "plate" (better referred to as a "curved lamp protector plate"). Since the quartz tubes are bent with such accuracy, using the above described method, they can be closely aligned, side-by-side to form the lamp protector plate with their ends held firmly within side plates 24, 25.

The curved reflector 22 comprises a plurality of linear reflector units 26 linked together, which are preferably gold-coated to provide a good reflective surface 27 for reflecting IR from the lamps.

Given the curved nature of the lamps and the lamp protection plate, the IR dryer 20 is located at a substantially constant distance from the moving paper web 3, because the lamp array and lamp protection plate follow the curved surface of the drying cylinder. Optimum drying occurs across the full width of the IR dryer.

The method of bending quartz tubes as described herein thus offers the possibility of improving the drying capability of an IR dryer by allowing the lamps to be situated at a constant, optimum distance from a drying cylinder, radiating normal to the surface of the cylinder.

Furthermore, the cost of manufacturing IR drying apparatus can be significantly reduced by using an array

of curved quartz tubes, bent as described herein, in place of the conventional flattened quartz plate used as a lamp protection plate.

CLAIMS

1. A method of bending an elongate quartz tube comprising the steps of

supporting the tube in a substantially vertical orientation;

gripping the tube near its uppermost end;

heating the tube at region intermediate its lowermost end and the uppermost end; and

moving the gripped uppermost end of the tube so that the tube, softened in the vicinity of the heating region, is bent.

2. A method as claimed in claim 1 wherein the gripped uppermost end of the tube is moved in an arc.

3. A method as claimed in claim 1 or claim 2 wherein the tube is counterbalanced.

4. A method as claimed in any of the preceding claims wherein the lowermost end of the tube is constrained to move in a substantially vertical path.

5. Apparatus for bending an elongate quartz tube comprising

support means for supporting the tube in a substantially vertical orientation;

gripping means for gripping the tube near its uppermost end;

heating means situated at region intermediate the lowermost end and the uppermost end of the tube; and

driving means for moving the gripped uppermost end of the tube, in use, so that the tube, softened in the vicinity of the heating means, is bent.

6. Apparatus as claimed in claim 5 wherein the heating means substantially surrounds the tube, in use.

7. Apparatus as claimed in claim 5 or claim 6 wherein the heating means comprises a plurality of gas burners.

8. Apparatus as claimed in claim 7 when dependent on claim 6 wherein the plurality of gas burners comprises a ring of gas burners, in the centre of which the tube is situated, in use.

9. Apparatus as claimed in any of claims 5-8 further comprising barrier means which has a curved surface against which the tube may abut, in use, so as to prevent lateral movement of the tube.

10. Apparatus as claimed in claim 9 wherein the barrier means comprises a wheel.

11. Apparatus as claimed in claim 10 wherein the wheel is removeable and replaceable with a wheel of different diameter.

12. Apparatus as claimed in any of claims 5-11 further comprising a counter-balance arrangement by means of which the lowermost end of the tube can be constrained in use, to follow a substantially vertical path.

13. Apparatus as claimed in any of claims 5-12 wherein said driving means comprises a pivotable arm, at one end of which is situated said gripping means, the arm being pivotable, in use, so that the gripping

means generally describes an arc.

14. Apparatus as claimed in claim 13 wherein said pivotable arm is driven by a motor.

15. Apparatus as claimed in any of the preceding claims wherein said gripping means is water-cooled.

---

16. A curved quartz tube manufactured using the apparatus and/or method of any of the preceding claims.

17. A curved quartz tube as claimed in claim 16 in which is located an infra red (IR) heating element.

18. An IR dryer for use in the papermaking industry including an array of curved lamps, each of which lamps comprises a heating element located within a curved quartz tube as claimed in claim 17.

19. An IR dryer as claimed in claim 18 including a curved reflector plate.

20. An IR dryer for use in the papermaking industry including a curved lamp protection plate which comprises an array of curved quartz tubes as claimed in claim 16.

ABSTRACT

A method of bending an elongate quartz tube comprising the steps of

supporting the tube in a substantially vertical orientation;

gripping the tube near its uppermost end;

heating the tube at region intermediate its lowermost end and the uppermost end; and

moving the gripped uppermost end of the tube so that the tube, softened in the vicinity of the heating region, is bent.

[Figure 4]

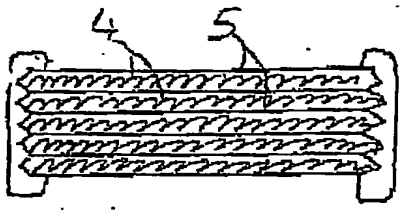

FIGURE 1A

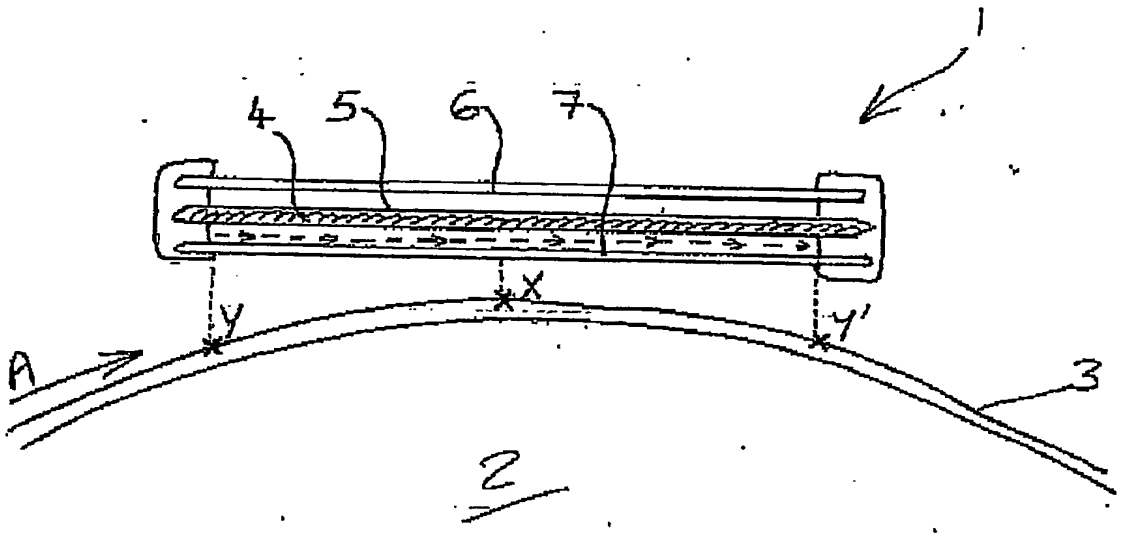

FIGURE 1
(PRIOR ART)

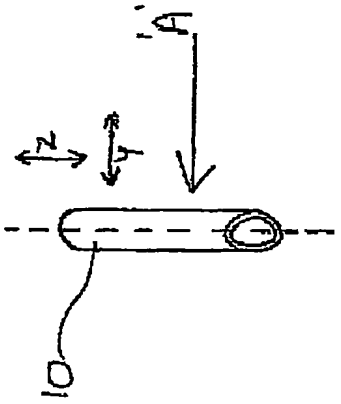

FIGURE 2A

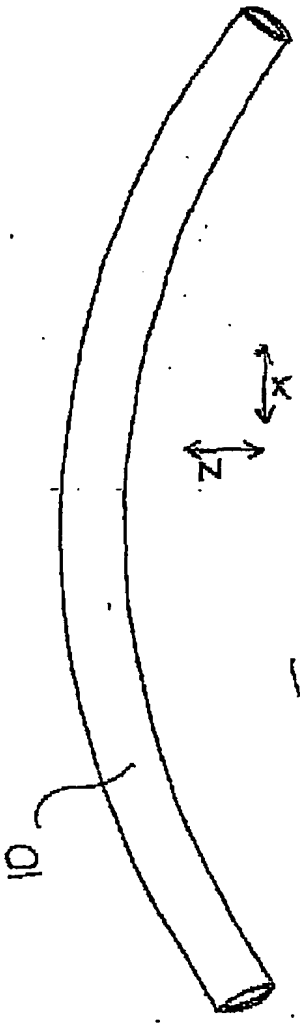

FIGURE 2B
(view in direction 'A')

3/6

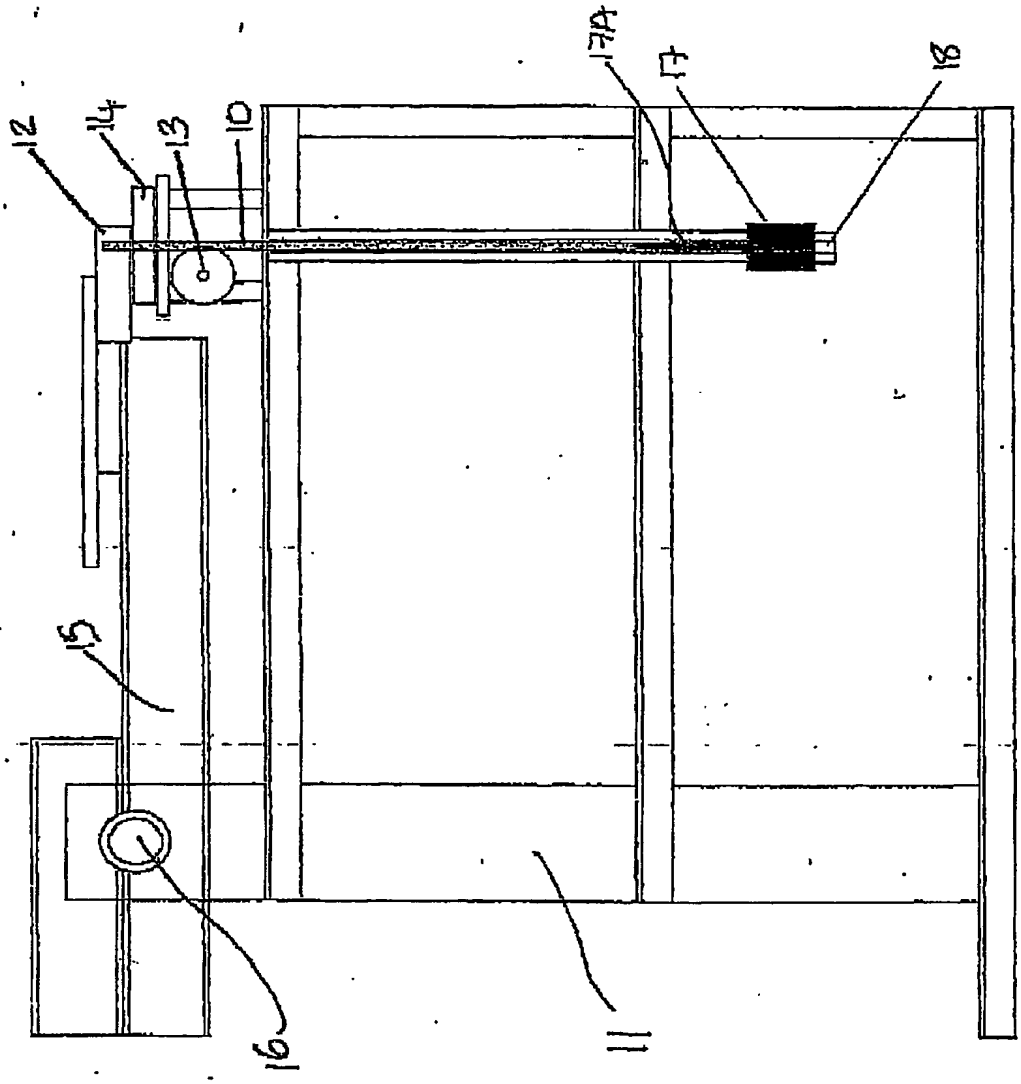

FIGURE 3

4/6

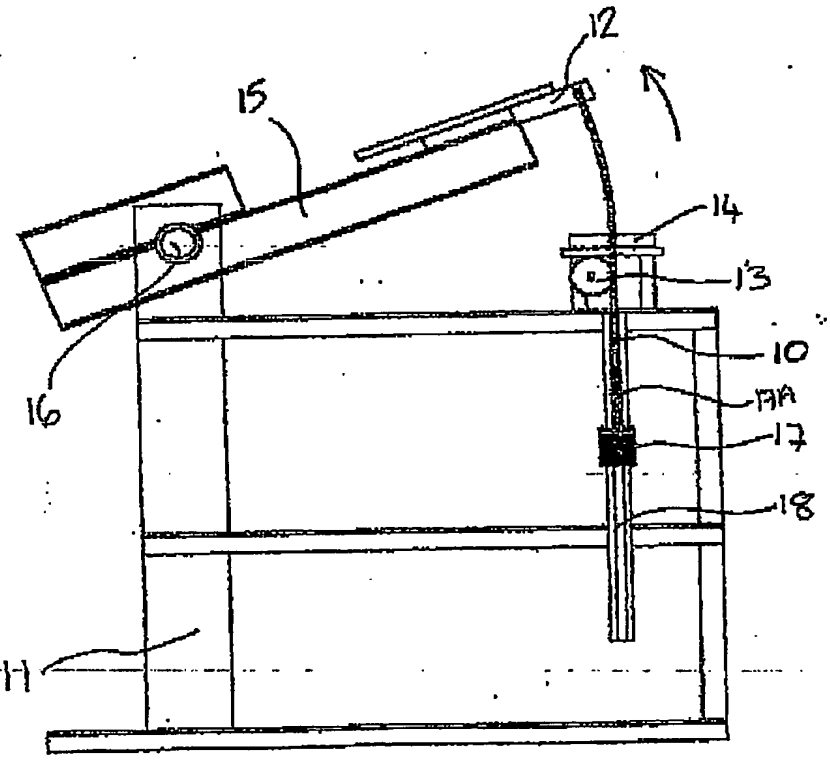

FIGURE 4

5/6

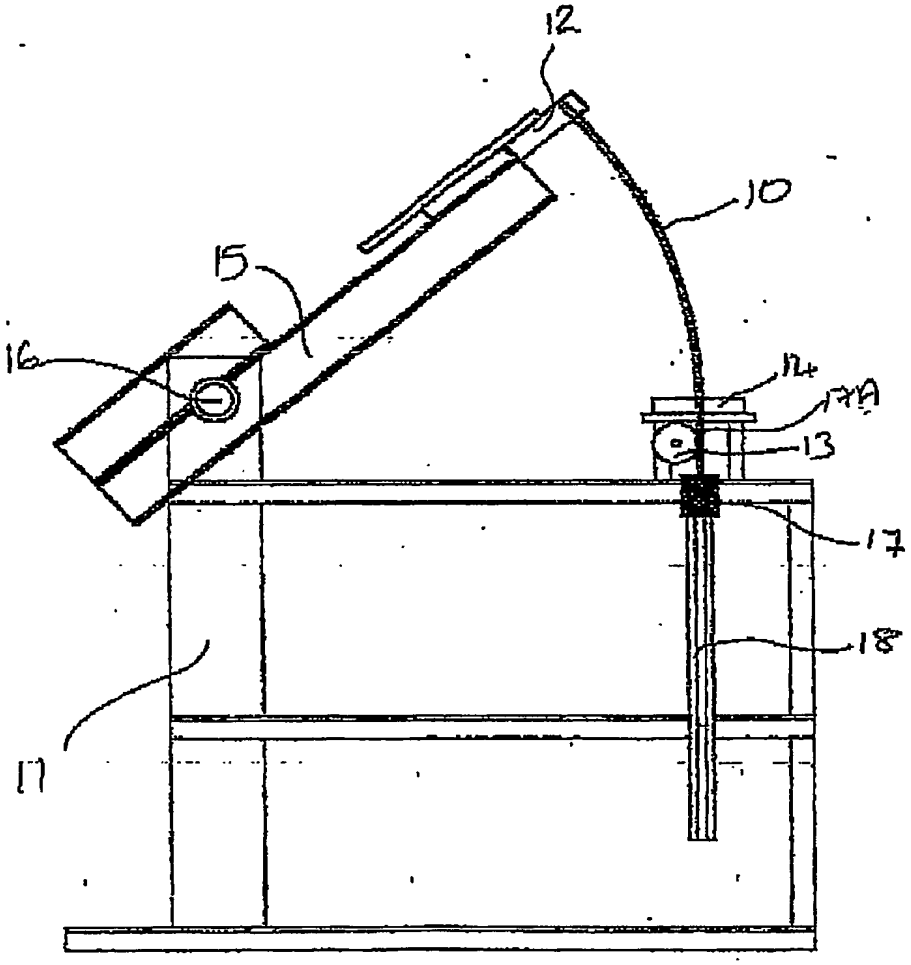

FIGURE 5

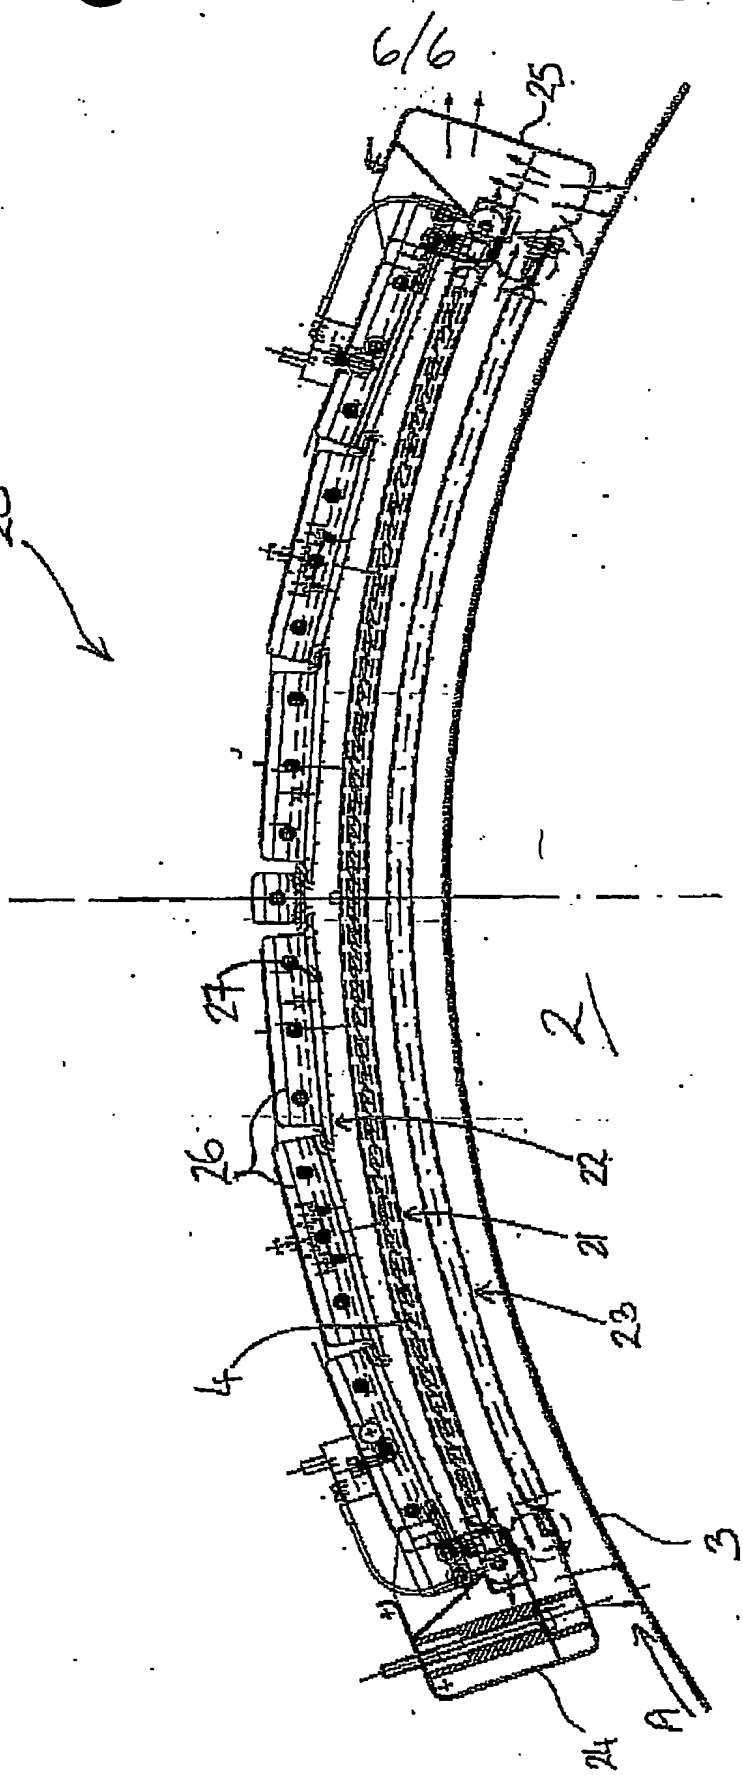

FIGURE 6

PCT/GB03/00697